




See also:



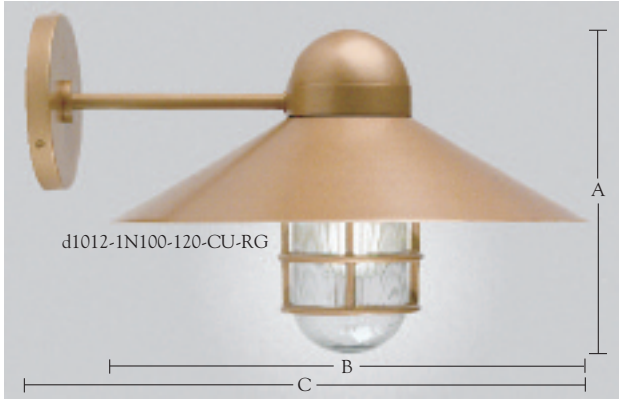


A B C
d1012: 9 1/4" 14" 16"
d1018: 11 1/3" 17" 19 1/2"

Item #	Lamping	Voltage	Fixture Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Work space for submittals

How to specify

Example from illustration at left

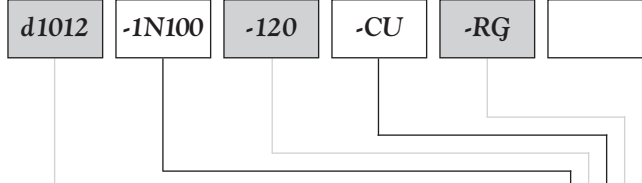

Item Number d1012 SOFT INDUSTRIAL wall fixture w/ shade
d1018 SOFT INDUSTRIAL wall fixture - Large

Construction Cast aluminum grill and fittings. Clear glass enclosure. 5" diam. x 1/2" deep canopy. (Fluorescent versions enclose ballast in 5" diam. x 2" deep canopy.) For standard wall junction box mounting. UL listed, cUL (ETL/ETLc for LED) certified for dry locations.

Lamping / Wattage IN100 Incandescent, one 100 W, medium base, A type
1N200* Incandescent, one 200 W, medium base, A type
LED6 LED, 6W LED with electronic driver. 552 Lumen output.
LED8* LED, 8W LED with electronic driver. 736 Lumen output.

*Available with d1018 only

Voltage 120 120V 277 277V

Fixture Finishes
See Page d9000 & d9000 Supplement for color renderings

WH White Gloss	G1 Light Grey	G2 Medium Grey
MG Metallic Grey	AN Metallic Anthracite	BG Black Gloss
MB Matte Black	BC Black Crinkle	CU Metallic Copper
BZ Metallic Bronze	T1 Light Tan	T2 Medium Tan
GM Metallic Green	SF Seafoam	BL Metallic Blue
RD Metallic Red	RB Bright Red	MP Magenta Pink
YL Bright Yellow	SCF Special Finish—must supply paint chip	

Options RG Ribbed Glass enclosure PS Perforated metal Sleeve
WET Wet Location UL/cUL (ETL/ETLc for LED) listed
SCF Special/Custom Finish. Customer to supply paint chip
DIM Dimming Driver (0-10V, Triac, or ELV, as specified)

* RG and PS cannot be ordered together

Special Orders For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.