




d5000



d5001

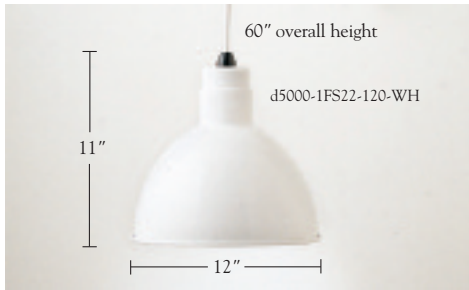

Item #	Lamping	Voltage	Finish	Options	Sp. Orders
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

How to specify

Work space for submittals

Example from top left illustration

d5000	-1N150	-120	-WH	<input type="text"/>	<input type="text"/>
--------------	---------------	-------------	------------	----------------------	----------------------

Item Number	d5000 d5001	12" diam. INDUSTROLITE pendant 16" diam. INDUSTROLITE pendant
Construction	Spun heavy gauge aluminum shade. 5" diam. steel canopy. White, three conductor hanging cord. For standard ceiling junction box mounting. UL listed, cUL (ETL/ETLc for LED) certified for dry locations.	

Lamping / Wattage	1N150 LED8	Incandescent, one 150 W, medium base, A type LED, 8W LED with electronic driver. 736 Lumen output.
--------------------------	-----------------------------	---

*Fixtures supplied less lamps.
Lamps may be
ordered from d'ac.*

Color Temperature Options: 2700, 3000K (standard), 3500K, and 4000K

Voltage	120	120V	277	277V
----------------	------------	------	------------	------

Finishes <i>See Page d9000 & d9000 Supplement for color renderings</i>	AL Brushed Aluminum	PA Polished Aluminum	Baked Enamels: G2 Medium Grey BG Black Gloss CU Metallic Copper T2 Medium Tan BL Metallic Blue MP Magenta Pink
	WH White Gloss	G1 Light Grey	
	MG Metallic Grey	AN Metallic Anthracite	
	MB Matte Black	BC Black Crinkle	
	BZ Metallic Bronze	T1 Light Tan	
	GM Metallic Green	SF Seafoam	
	RD Metallic Red	RB Bright Red	
YL Bright Yellow	SCF Special Finish—must supply paint chip		

Options	BHC Black, three conductor hanging cord	STEM Rigid, 1/2" diam. stem
	CEQ California Earthquake Swivel—must use rigid stem	
	8-A Dimming Driver (0-10V, Triac, or ELV, as specified)	

Special Orders For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.